

We test, You produce.

Ioniq 20

LEAK TESTER FOR HIGH VOLUME PRODUCTION PRODUCTION BATTERY POUCH CELL TESTING

On the basis of its well proven concept of production line QC Testers, ATEQ has developed a new leak tester designed for the specific requirements of high volume production of plastic parts. This instrument is used for the detection of localized moulding faults, insufficient membrane thickness, perforations, etc. This instrument has also proven to be effective on testing pouch battery cells.

The IONIQU is based on discharge current measurement and is able to detect defects up to of 10µm.

Highlights

- 1 to 3 SIMULTANEOUS TEST CHANNELS
- DISPLAY 1 to 3 CHANNELS
- FOR INDUSTRIAL LINE AND LABORATORY



Applications

Battery pouch cells, plastic bottle caps, plastic packaging, plastic coverings...





Ioniq 20

LEAK TESTER FOR HIGH VOLUME PRODUCTION PRODUCTION BATTERY POUCH CELL TESTING

Measurement principle

- The IONIQU measures the current flowing between a patented charged probe and a ground plate placed under the part to be tested.
- The IONIQU uses the % of the nominal voltage (which reflects the discharge current), measured on the part as PASS/FAIL level.
- In a PASS situation (fig 1): No hole, no weak part, the IONIQU measures a high %. The measured voltage and the nominal voltage are virtually equal. The result is above the reject level, the part has passed the test.
- In a FAIL situation (fig 2): The IONIQU measures a low %. The measured voltage is significantly below the nominal voltage. The result is below the reject level, the part has failed the test.
- Test limitations: short probe-part-plate distance, electrical insulation from environment.

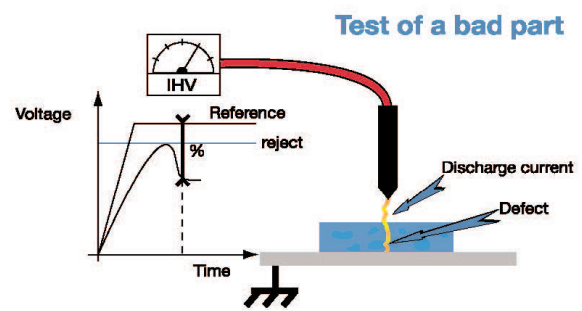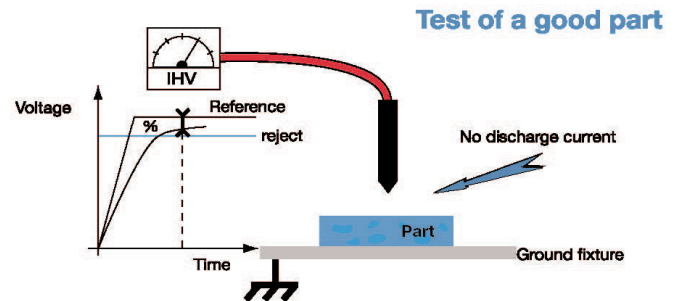

Main features

- Integrated ionising high voltage generator (5 to 27.3 kV)
- Reject levels as % of nominal voltage (0 to 100%)
- Monitoring and protection of high voltage generator
- Limitation of the current rating
- Speed: Minimum cycle time 0.6s
- I/O's for instrument control and results
- 32 programs
- Remote control allows the test module to be closed to the test part
- And: Language selection, customization of test ...

Technique features

High voltage generator	Integrated and adjustable according to application (5 to 27.3 kV)
Temperature	Operating: + 10°C à + 45°C Storage: 0°C à + 60°C
Dimensions	Box dimensions: dimensions : H x L x P = 136 x 250 x 255 mm Weight: 8 kg Remote control: dimensions: H x L x P = 250 x 250 x 60 mm Weight: 2.8 kg
Power supply	24 VDC/ 1A Note: The instrument needs a good ground connection

Interfaces	Programming via remote control 7 inputs / 5 outputs for PLC controlled applications. Inputs: Optically isolated. 24 V - 10 mA maximum or dry contact. Outputs: Relay output Rated 48 V / 200 mA maximum.
Optional	Save results module Standard resistor box with 2 values

